





Fixture Name: Madera 1821-M1L BI

This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

## PARTS LIST

Company Name: \_\_\_\_\_ Co. Account #: \_\_\_\_\_  
to be filled out by retailer

Canopy  1ea @5-1/2"x1-1/2"	Wire Connectors  3ea P4 Orange	Hex Nut  2ea @3/8 x 3mm
Chain  1ea 6ft x3.8mm	Junction Box Screw  2ea 8/32" x 1"	Spring Washer  1ea @15 x 2mm
Chain Connector  2ea @4.2X50mm	Canopy Loop with Collar  1ea @3/8 x 40mm x 5mm	Nipple  1ea @3/8 x 50mm
Mounting Strap w/ ground screw  1ea 3/4"x4"		

Part Needed	_____	Quantity	_____
Part Needed	_____	Quantity	_____
Reason why	( missing, scratched, broken glass, bent, bad finish)		
Comments	_____		


### FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

#### ASSEMBLING THE FIXTURE (Fig. 1)

\* the glass shade should come with the metal cage already attached.

- Place each small screw (N) and washer (P) through holes on inside of glass shade (O), add another washer (P) on the outside of glass shade.
- Lower metal cage (M) over glass shade, lining the holes up with the screws and turn the small screw until tight to secure the cage to the glass shade.

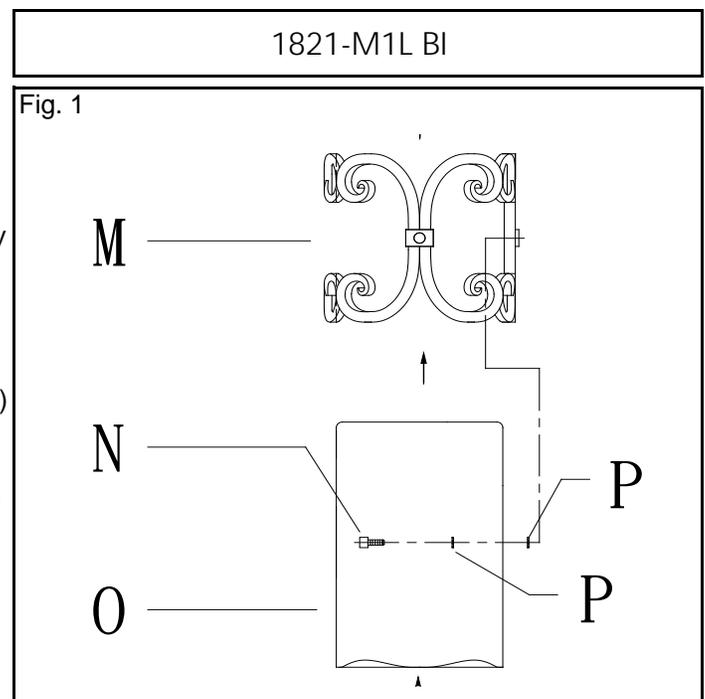

# PARTS & ASSEMBLY SHEET

Fixture Name: Madera 1821-M1L BI

## ASSEMBLING THE FIXTURE (Fig. 2)

- Place the Socket/Top loop assembly (J) on Glass shade (M/O).
- Holding these pieces together, slide the Spacer (Q) on socket and secure it by threading the Socket ring (R) onto the threaded socket until tight.
- By measuring determine correct number of links needed for proper hanging height. Use a pair of pliers to open one link of the Chain (K) then remove the excess Chain (K) and discard it.
- Use one chain connector (L) to attach one end of the chain to the Top loop (J) and close the chain connector.
- Feed the fixture wires through the Chain (every three links) and pull the wires until taut.
- Slip Canopy loop collar (H) over the chain, then do the same with the canopy (G).
- When ready to complete the installation Use the other chain connector and attach the other end of the chain to the canopy loop (F) and close the chain connector.
- Make sure the weight of the chandelier will be supported by the chain-not the electrical wire.


\* You may now install the fixture.

Note: Complete these remaining steps after the fixture is hung.

- Install the light bulb (not provided) in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING)

Fig. 2

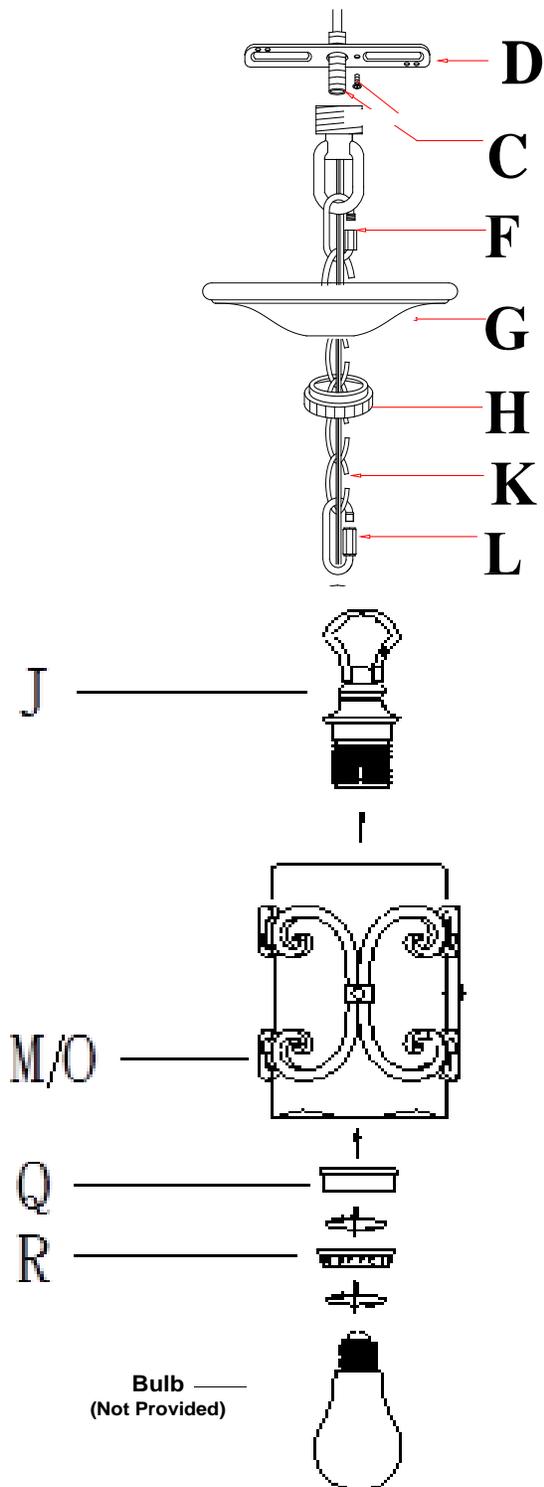

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE (Fig. 1)

- Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and parts list.
- Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old mounting strap.
- Thread Nipple(C) into Canopy Loop (F) until snug.
- Thread other end of the Nipple (C) with Canopy Loop attached into Mounting Strap (D).
- Place Lock Washer (B) over end of Nipple (C) protruding through Mounting Strap (D) and thread Hex Nuts (A) onto Nipple until tight.
- Take this mounting strap assembly and mount to ceiling junction box with junction box Screws (E). Tighten screw securely with screw driver.
- Unscrew the Canopy loop collar (H) from the Canopy loop. Take the canopy and pass over the Canopy loop. approximately one half of the canopy loop exterior threads should be exposed. Adjust until desired height is reached. \*the Canopy loop collar should fit snugly on the Canopy loop after the canopy is installed. Remove Canopy and Canopy lock collar.
- Assemble the fixture and have an assistant or secure support hold the weight of the fixture while you complete the wiring connections.
- Thread the fixture wires and ground wire of the assembled fixture through the canopy loop and nipple and into the outlet box.

### CONNECTING THE WIRES (Fig. 2)

- Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
  - Attach the GROUND wire(GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (D) or connect both wires together using the correct size of wire connectors.
- NOTE:** Twist the wires together in the same direction you twist the wire connector onto the wires.
- Tuck these wire connections neatly into the Junction Box.
  - Raise Canopy (G) to the ceiling and secure in place by tightening the Canopy loop collar (H) into the Canopy Loop (F).

Fig. 1


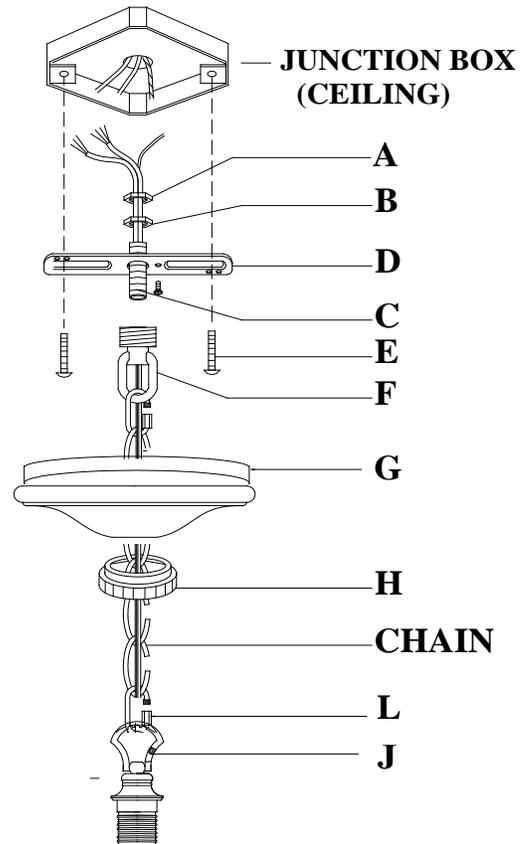


Fig. 2

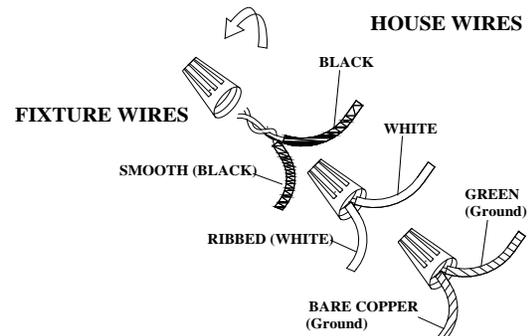

**YOUR INSTALLATION IS NOW COMPLETE.  
RETURN POWER TO THE JUNCTION BOX  
AND TEST THE FIXTURE.**