

Assembly Instructions: 7035-3P/5P (Quinn)

IMPORTANT:


- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase.

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Remove the old fixture from the ceiling, including the old mounting strap.

1. Take the mounting strap assembly from the parts bag. One end of nipple (F) should be attached to mounting strap (A) with a washer and hex nut (C and D) in place. The other end should have canopy loop (H) attached.
2. Use a screwdriver and mounting screws (B) to attach mounting strap (A) to the junction box. (Unscrew canopy loop collar (I) from canopy loop (H). Pass canopy (G) over the mounted canopy loop to test the height. Approximately half of the canopy loop's exterior threads should be exposed, and the canopy loop collar should fit snugly onto the canopy loop. Remove canopy (G) and adjust the height of nipple (F) and canopy loop (H) until the desired height is reached.)

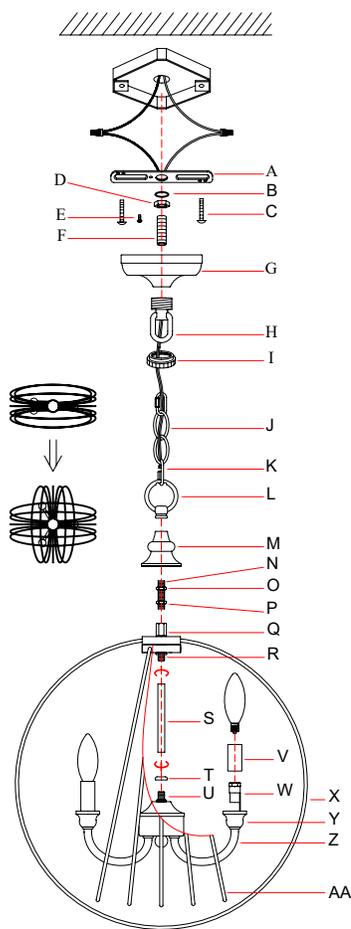


ASSEMBLING THE FIXTURE

3. Nut (T) and rod (S) are on the fixture's wires. Thread nut (T) and rod (S) onto post (U). Then twist rod (S) onto post (R).
4. Metal rings (XX and AA) as well as fixture arms (Z) are flat for packaging purposes.
5. Slide arms (Z) and metal rings (X and AA) apart until the rings are equally spaced apart.
6. Nuts (O and P), nipple (N), top cap (M) and top loop (L) are on the fixture's wires, but not attached. Thread nut (P) onto the bottom of nipple (N). Thread the bottom of nipple (N) into post (Q) before threading nut (O) onto the top of nipple (P). Screw top cap (M) and top loop (L) onto the threads of nipple (N).
7. By measuring, determine the correct number of chain links needed for proper hanging height. If necessary, use a pair of pliers to open and remove any excess chain. Attach chain connectors (K) to each end of chain (J) before attaching one end of the chain connector and chain to top loop (L). Close the chain connector. Connect the other chain connector (K) to canopy loop (H). Feed the fixture's wires up through top loop (L) then through chain (J) (every three links or so).
8. Pull the wires until taut. Gently slide canopy loop collar (I) and canopy (G) onto the chain/wires.

How to Identify the Fixture's Wires

Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	
Black Inner Thread	White Inner Thread	

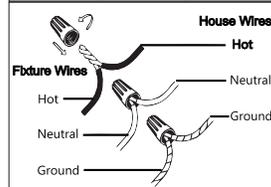

CONNECTING THE WIRES

9. Have an assistant support the fixture's weight while completing the wiring. Refer to the wiring diagram below and attach the fixture's wires to the power supply wires from the junction box. Connect Hot to Hot, Neutral to Neutral, and Ground to Ground. Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, locate ground screw (E) on the mounting bracket/mounting strap and wrap the fixture's ground wire around the ground screw. Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting strap. Tuck the wires into the junction box.

FINISHING THE INSTALLATION

10. Push canopy (G) up to the ceiling. Slide canopy loop (H) and canopy loop collar (I) up beneath the canopy. Tightly thread canopy loop collar (I) onto canopy loop (H) to secure canopy (G) in place.
11. Slide candle sleeves (V) over sockets (W). Adjust until the candle sleeves are straight.
12. Install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.