


# Assembly Instructions: 7151-SF (Bellare)

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

**For Customer Service, contact the place of purchase to arrange for replacement parts.**

## SEMI-FLUSH INSTALLATION

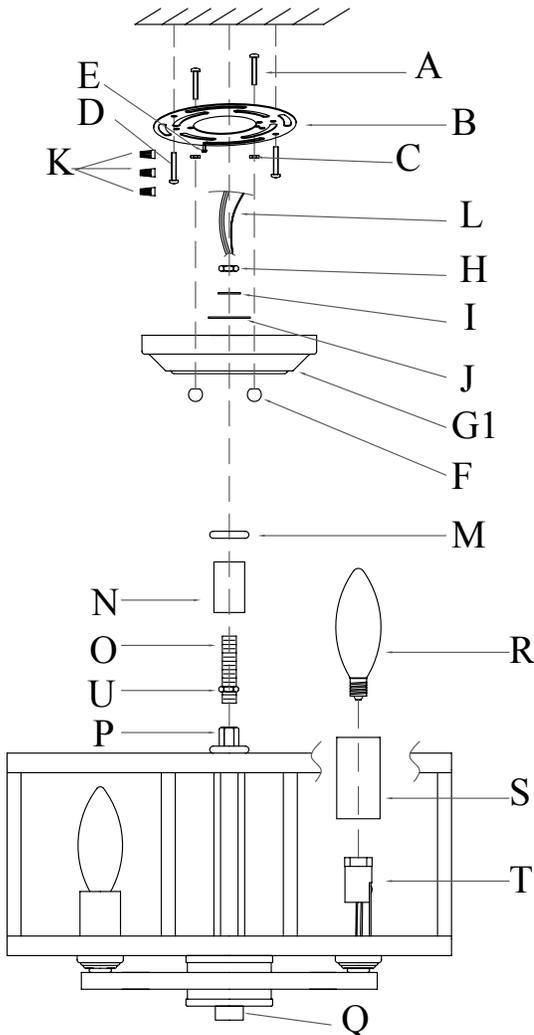

## PREPARING FOR INSTALLATION

Please note that this fixture can be installed as a semi-flush or as a pendant and includes two canopies (G1 and G2). Please decide how you would like to install the fixture and choose the appropriate canopy. Canopy (G1) has two small holes and one hole in the center. This canopy is used for semi-flush installation. For semi-flush installation, please follow the instructions below. Canopy (G2) has a large hole in the center. This canopy is used for pendant installation. For pendant installation, please flip the page and follow the instructions.

Carefully remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old Mounting plate.

From the parts bag remove the mounting plate assembly. mounting plate (B) contains several pairs of threaded holes. Find the pair of holes that matches the spacing of the holes on the junction box and your fixture backplate. Two of mounting screws (A) should be attached to mounting plate (B). You may need to tighten the nuts that hold these screws in place. Pull the house wires through the center of mounting plate (B). Place mounting plate (B) over the junction box so that mounting screws (A) are vertical, and in alignment with the hole locations on the fixture's canopy (G1). Secure mounting plate (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.

Take fixture body (Q) out of the box. Screw nipple (O) into post (P). Secure in place with hex nut (H). Slide cover (N) and spacer (M) over nipple (O). Slide canopy (G1) over the exposed threads of nipple (O). Then slide on gasket (J), and spacer (I). Twist on hex nut (H) to lock the pieces together.

## CONNECTING THE WIRES


Attach the power supply wires from the junction box to the fixture's wires. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw on mounting plate (B) and wrap the fixture's ground wire around the green ground screw. Use a screwdriver to secure the ground screw onto the Mounting plate. Tuck all wires neatly into the junction box.

## FINISHING THE INSTALLATION

Raise canopy (G1) to mounting plate (B) and position mounting screws (A) so that they protrude through the openings of canopy (G1). Secure canopy (G1) in place with decorative nuts (F).

Slide candle sleeves (S) over sockets (T). Install light bulbs (R - not provided) in accordance with the fixture's specifications. Do not exceed the recommended wattage.

Your installation is now complete. Turn on the power and test the fixture.

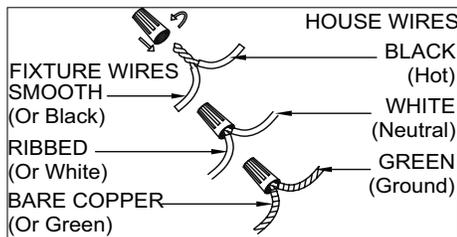

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.



# Assembly Instructions: 7151-SF (Bellare)

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

**For Customer Service, contact the place of purchase to arrange for replacement parts.**

## PENDANT INSTALLATION

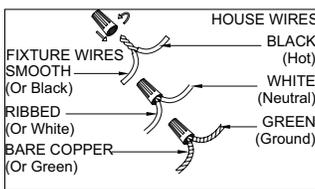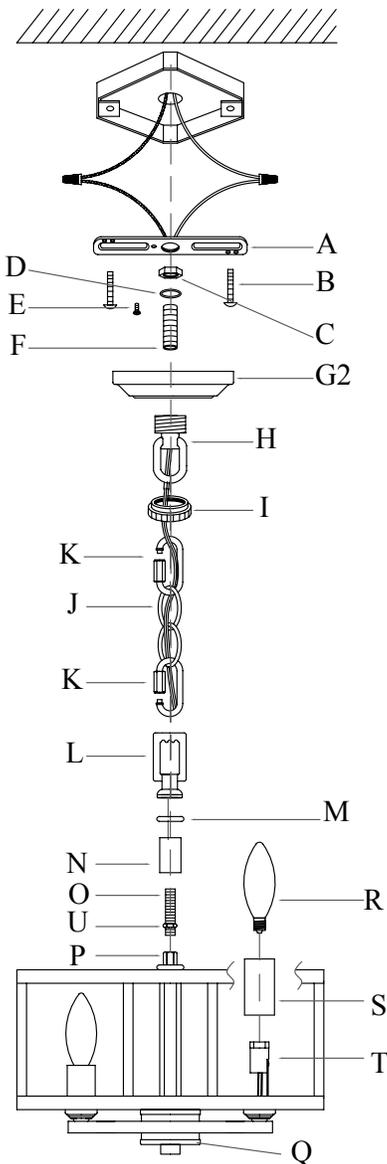

## PREPARING FOR INSTALLATION

Please note that this fixture can be installed as a semi-flush or as a pendant and includes two canopies (G1 and G2). Please decide how you would like to install the fixture and choose the appropriate canopy and instructions. Canopy (G2) has a large hole in the center. This canopy is used for pendant installation. For pendant installation, please follow the instructions below. Canopy (G1) has two small holes and one hole in the center. This canopy is used for semi-flush installation. For semi-flush installation, flip the page and follow the instructions.

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap. From the parts bag remove the mounting strap assembly. One end of nipple (F) should be attached to mounting strap (A) with washer and hex nut (C, D) in place. The other end should have canopy loop (H) attached. Attach mounting strap (A) to the junction box using mounting screws (B) and a screwdriver. Tighten securely. Unscrew canopy loop collar (I) from canopy loop (H). Pass canopy (G2) over the mounted canopy loop to test the height. Approximately half of the canopy loop's exterior threads should be exposed, and the canopy loop collar should fit snugly onto the canopy loop. Remove canopy (G2) and adjust the height of nipple (F) and canopy loop (H) until the desired height is reached.

## ASSEMBLING THE FIXTURE

Top loop (L) may be on the fixture's wires, but not threaded onto the fixture's frame (Q). If it is not connected, pull the fixture's wires through nipple (O), cover (N), spacer (M) and up through top loop (L) before twisting the bottom of nipple (O) into post (P) of the fixture's body (Q). Secure in place with hex nut (U). Slide cover (N) down over nipple (O) and thread spacer (M) onto the top threads of nipple (O). Tighten top loop (L) to nipple (O).

By measuring, determine the correct number of chain links needed for proper hanging height. If necessary, use a pair of pliers to open and remove any excess chain. Attach chain connectors (K) to each end of chain (J) before attaching one end of the chain connector/chain to top loop (L). Close the chain connector. Connect the other chain connector (K) to canopy loop (H). Feed the fixture's wires up through top loop (L) then through chain (J) (every three links or so). Pull the wires until taut. Slide canopy loop collar (I) and canopy (G2) onto the chain/wire.

## CONNECTING THE WIRES

Have an assistant support the fixture's weight while completing the wiring. Cut away excess wire. Thread the fixture's wires through canopy loop (H) and nipple (F). Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) coming from the junction box, locate ground screw (E) on mounting strap (A) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

## FINISHING THE INSTALLATION

Push canopy (G2) up to the ceiling and slide canopy loop collar (I) up beneath the canopy. Tightly thread canopy loop collar (I) onto canopy loop (H) to secure canopy (G2) in place.

Reach over and through the cage to slide candle sleeves (S) over sockets (T). Install light bulbs (R - not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is now complete. Turn on the power and test the fixture.

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

