

Assembly Instructions: 5019-3/3SF, 6/6SF (Alyssa)

For Customer Service, please contact the place of purchase.



IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

Please note that the fixture may be hung as a pendant or a semi-flush mount. Please decide how you would like the fixture to be installed and refer to the corresponding instructions.

SEMI-FLUSH INSTALLATIONS

This fixture has multiple installation options. Before beginning, please review these instructions carefully.

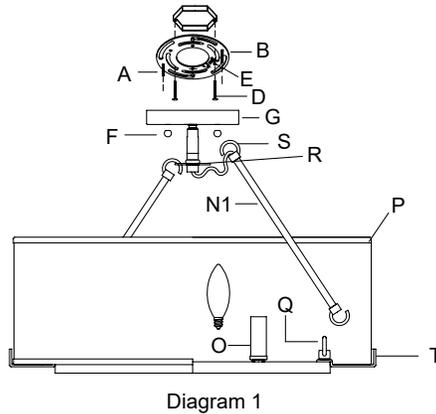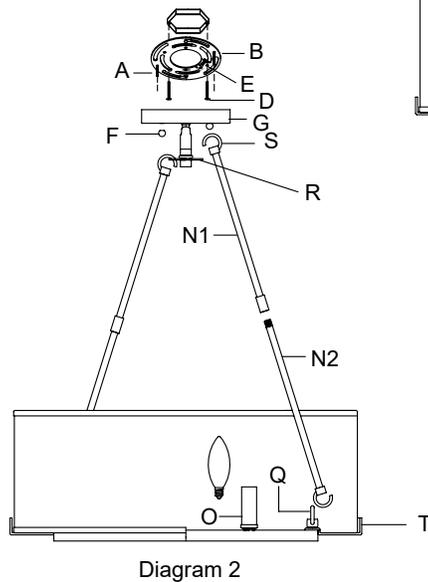

How to Identify the Fixture's Wires		
Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	
Black Inner Thread	White Inner Thread	

House Wires	
Hot	Neutral
Hot	Neutral
Neutral	Ground
Ground	

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

1. Mounting strap (B) contains several pairs of threaded holes. Locate mounting screws (A) and thread them into mounting strap (A).
2. Test canopy (G) against mounting strap (B) to ensure that there are enough threads exposed through the holes in the canopy to tightly thread on deco nuts (F). If not, adjust mounting screws (A) until this is possible. Place the canopy and deco nuts aside. Keep mounting screws (A) in place and secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.
3. Place the lamp body on a flat surface. Decide if you will install the fixture with (N1), (N2), or both. Place shade (P) onto frame (T). One side of connector rods (N1) and (N2) has the fixture's wires inside. **For the shortest installation (Diagram 1), please remove connector rod (N2). Unscrew hook (S) from (N2) and attach it to the free end of connector rod (N1).** Hook connector rods (N1) and/or (N2) to the frame at loops (Q). Please note: the diagram depicts how the hooks on the rods should be connected on the fixture. Pull the fixture's wires until taut. Attach the top of connector rod(s) (N) onto plate (R).

CONNECTING THE WIRES

4. Have an assistant support the fixture weight while completing the wiring. Cut away excess wire. Attach the fixture's wires to the power supply wires from the junction box. Connect Hot to Hot (this is the black, transparent wire with black inner thread, or smooth wire), Neutral to Neutral (the neutral wire is the white, transparent wire with white inner thread, or the ribbed wire), and Ground to Ground (the green, transparent wire with green inner thread, or the copper wire). Twist the ends of each wire pair together. Secure each connection with a wire connector (usually orange). Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, please locate ground screw (E) on the mounting strap/mounting bracket (B) and wrap the fixture's ground wire around ground screw (E). Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting bracket. Tuck the wires into the junction box.

FINISHING THE INSTALLATION

5. Raise canopy (G) to the ceiling. Position mounting screws (A) so that they protrude through the openings of canopy (G). Secure canopy (G) to mounting strap (B) with decorative nuts (F).
6. Slide candle sleeves (O) over the sockets. Install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

Assembly Instructions: 5019-3/3SF, 6/6SF (Alyssa)

For Customer Service, please contact the place of purchase.

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

Please note that the fixture may be hung as a pendant or a semi-flush mount. Please decide how you would like the fixture to be installed and refer to the corresponding instructions.

PENDANT INSTALLATION - PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

1. Mounting strap (B) contains several pairs of threaded holes. Locate mounting screws (A) and thread them into mounting strap (A).
2. Test canopy (G) against mounting strap (B) to ensure that there are enough threads exposed through the holes in the canopy to tightly thread on deco nuts (F). If not, adjust mounting screws (A) until this is possible. Place the canopy and deco nuts aside. Keep mounting screws (A) in place and secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.
3. Place the lamp body on a flat surface. Decide if you will install the fixture with (N1), (N2), or both. Place shade (P) onto frame (T). One side of connector rods (N1) and (N2) has the fixture's wires inside. **For the shortest installation (Diagram 1), please remove connector rod (N2). Unscrew hook (S) from (N2) and attach it to the free end of connector rod (N1).** Hook connector rods (N1) and/or (N2) to the frame at loops (Q). Please note: the diagram depicts how the hooks on the rods should be connected on the fixture. Pull the fixture's wires until taut. Attach the top of connector rod(s) (N) onto plate (R).
4. Measure to determine the correct number of rods needed for proper hanging height. To lengthen the fixture, add additional rods. If additional rods are needed, contact the place of purchase to order. To shorten the fixture, add at least 8 to 10 inches of wire to the desired length and trim the wires. Slide any excess rods off the fixture's wires to discard.
5. Pull the wires taut through the rods before threading the rods together. Thread bottom rod (K or L) onto post (M) at the center of the fixture's body. Twist top rod (K or L) into the threads of swivel post (I) of canopy (G). Lock the rod(s) in place by twisting thumb screw (G). Pull the fixture's wires through the top of canopy (G).


CONNECTING THE WIRES

6. Have an assistant support the fixture weight while completing the wiring. Cut away excess wire. Attach the fixture's wires to the power supply wires from the junction box. Connect Hot to Hot (this is the black, transparent wire with black inner thread, or smooth wire), Neutral to Neutral (the neutral wire is the white, transparent wire with white inner thread, or the ribbed wire), and Ground to Ground (the green, transparent wire with green inner thread, or the copper wire). Twist the ends of each wire pair together. Secure each connection with a wire connector (usually orange). Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, please locate ground screw (E) on the mounting strap/mounting bracket (B) and wrap the fixture's ground wire around ground screw (E). Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting bracket. Tuck the wires into the junction box.

FINISHING THE INSTALLATION

7. Raise canopy (G) to the ceiling. Position mounting screws (A) so that they protrude through the openings of canopy (G). Secure canopy (G) to mounting strap (B) with decorative nuts (F).
8. Slide candle sleeves (O) over the sockets. Install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is complete. Turn on the power and test the fixture.

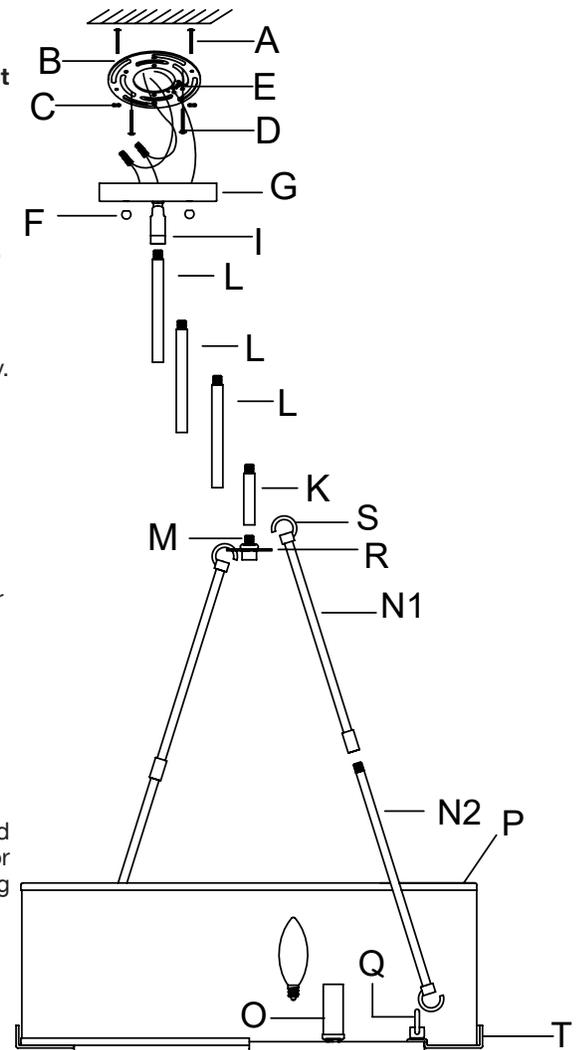

How to Identify the Fixture's Wires			
Hot	Neutral	Ground	
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread	Hot Neutral Ground
Black	White		
Black Inner Thread	White Inner Thread		

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.