

# Assembly Instructions: 5019-3/3SF & -6/6SF (Alyssa)



For Customer Service, please contact the place of purchase.

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

Please note that the fixture may be hung as a pendant or a semi-flush mount. Please decide how you would like the fixture to be installed and refer to the corresponding instructions.

## SEMI-FLUSH INSTALLATIONS

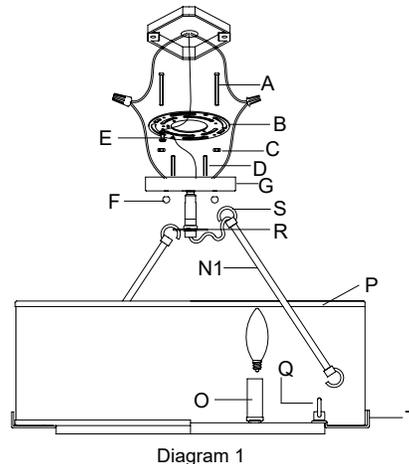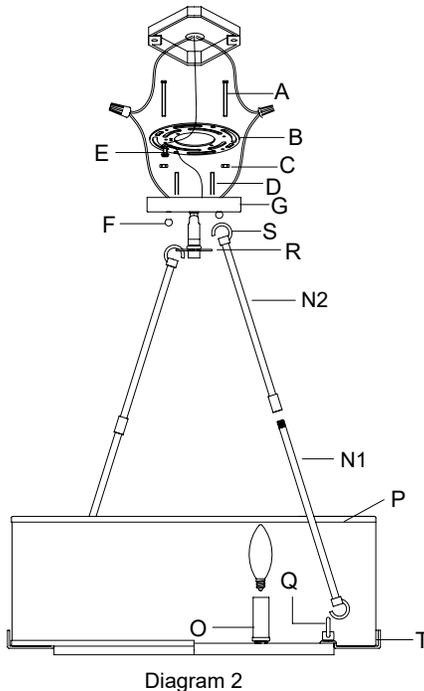


## PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

1. Mounting strap (B) contains several pairs of threaded holes and may have two of mounting screws (D) attached. If so, you may need to tighten hex nuts (C) that hold the screws in place. If mounting strap (B) does not have mounting screws (A) attached, please find the screws and hex nuts and attach the screws to the mounting strap.
2. Test canopy (G) to mounting strap (B) to ensure that with the screws in place the canopy can attach to the mounting strap with deco nuts (F). Adjust mounting screws (A) until this is possible. Place the canopy and deco nuts aside. Secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.
3. Place the lamp body on a flat surface. Place shade (P) onto frame (T). One side of connector rods (N1) and (N2) has the fixture's wires inside. **For the shortest installation (Diagram 1), please remove connector rod (N2). Unscrew hook (S) from (N2) and attach it to connector rod (N1).** Hook connector rods (N1) and/or (N2) to the frame at loops (Q). Pull the fixture's wires until taut. Attach the top of connector rods (N) onto plate (R).

### How to Identify the Fixture's Wires

Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or
Black	White	Green Inner
Black Inner Thread	White Inner Thread	Thread

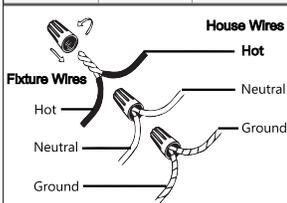

## CONNECTING THE WIRES

4. Have an assistant support the fixture weight while completing the wiring. Cut away excess wire. Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (B) and wrap the fixture ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

## FINISHING THE INSTALLATION

5. Raise canopy (G) to the ceiling. Position mounting screws (A) so that they protrude through the openings of canopy (G). Secure canopy (G) to mounting strap (B) with decorative nuts (F).
6. Slide candle sleeves (P) over the sockets. Install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is complete. Turn on the power and test the fixture.

### CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.



# Assembly Instructions: 5019-3/3SF & -6/6SF (Alyssa)

For Customer Service, please contact the place of purchase.

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

Please note that the fixture may be hung as a pendant or a semi-flush mount. Please decide how you would like the fixture to be installed and refer to the corresponding instructions.

## PENDANT INSTALLATION - PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

1. Mounting strap (B) contains several pairs of threaded holes and may have two of mounting screws (D) attached. If so, you may need to tighten hex nuts (C) that hold the screws in place. If mounting strap (B) does not have mounting screws (A) attached, please find the screws and hex nuts and attach the screws to the mounting strap.
2. Test canopy (G) to mounting strap (B) to ensure that with the screws in place the canopy can attach to the mounting strap with deco nuts (F). Adjust mounting screws (A) until this is possible. Place the canopy and deco nuts aside. Secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.
3. Place the lamp body on a flat surface. Place shade (P) onto frame (T). One side of connector rods (N1) and (N2) has the fixture's wires inside. **Please note: you may choose to remove one of the connector rods. You can remove connector rod (N2). Unscrew hook (S) from (N2) and attach it to connector rod (N1).** Hook connector rods (N1) and/or (N2) to the frame at loops (Q). Pull the fixture's wires until taut. Attach the top of connector rods (N) onto plate (R).
4. Measure to determine the correct number of rods needed for proper hanging height. To lengthen the fixture, add additional rods. If additional rods are needed, contact the place of purchase to order. To shorten the fixture, add at least 8 to 10 inches of wire to the desired length and trim the wires. Slide any excess rods off the fixture's wires to discard.
5. Pull the wires taut through the rods before threading the rods together. Thread bottom rod (K or L) onto post (M) at the center of the fixture's body. Twist top rod (K or L) into the threads of swivel post (I) of canopy (G). Lock the rod(s) in place by twisting thumb screw (G). Pull the fixture's wires through the top of canopy (G).


## CONNECTING THE WIRES

6. Have an assistant support the fixture weight while completing the wiring. Cut away excess wire. Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (B) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

## FINISHING THE INSTALLATION

7. Raise canopy (G) to the ceiling. Position mounting screws (A) so that they protrude through the openings of canopy (G). Secure canopy (G) to mounting strap (B) with decorative nuts (F).
8. Slide candle sleeves (P) over the sockets. Install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is complete. Turn on the power and test the fixture.

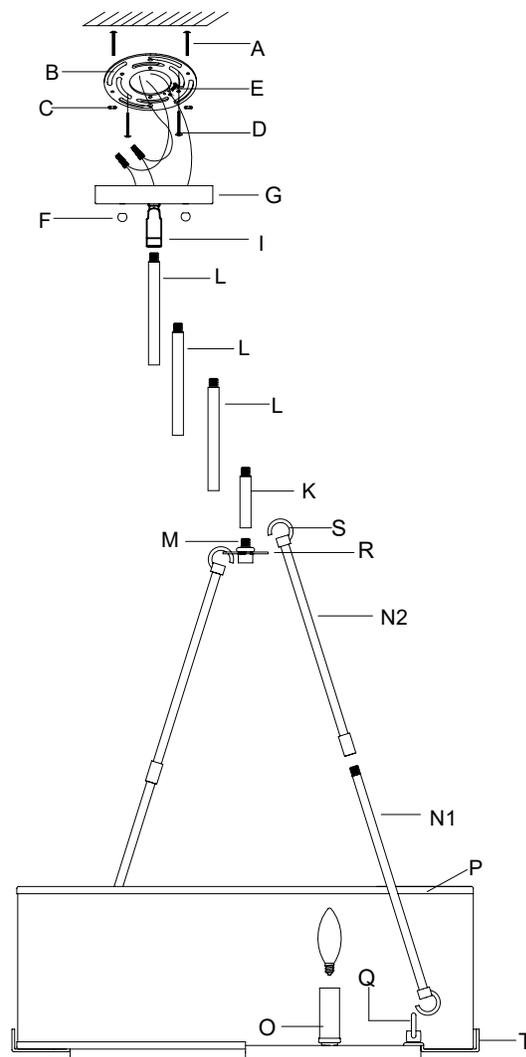

How to Identify the Fixture's Wires		
Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	
Black Inner Thread	White Inner Thread	

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

