
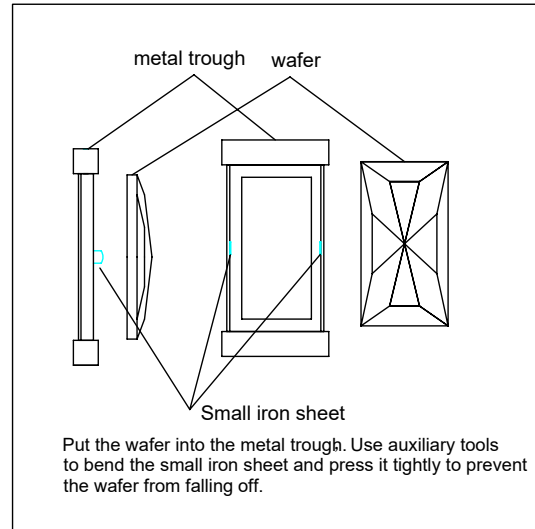


# Assembly Instructions: 1374-1W (Ariana)

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

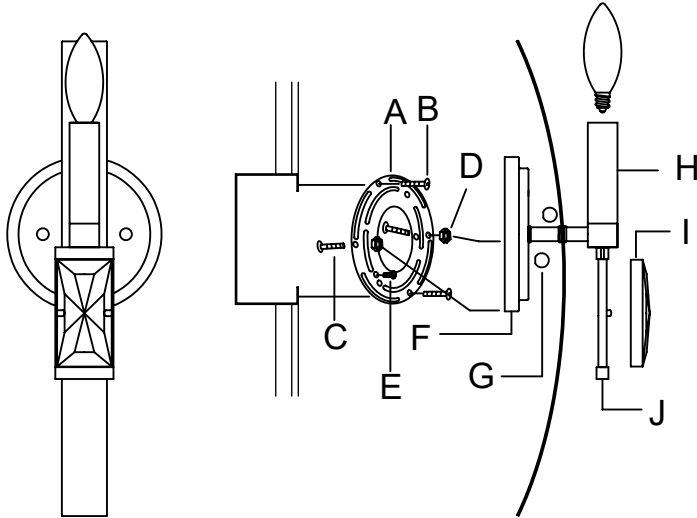

## PREPARING FOR INSTALLATION

Carefully remove the new fixture from the carton as well as the yellow bag that holds all of the parts. See the important notes above. Shut off power at the circuit breaker and remove old fixture from wall, including the old mounting strap.

1. Mounting strap (A) contains several pairs of threaded holes and two sets of mounting screws (B & C). You may need to tighten hex nuts (D) to hold mounting screws (C) in place.
2. Place mounting strap (A) up to your junction box. Place backplate (F) over the mounting strap (A) lining up mounting screws (C) with the holes in backplate (F). This will allow you to ensure that you are hanging the fixture straight. Remove the backplate and set aside for later.
3. Pull the house wires through the center of mounting strap (A). Secure mounting strap (A) to the junction box with mounting screws (B) and a screwdriver. Tighten the screws securely.

## CONNECTING THE WIRES

4. Attach the fixture's wires to the exposed house wires that were just pulled from the junction box. Connect black to black (or smooth); white to white (transparent with white thread or ribbed); and ground wires green to green (bare copper or transparent with light green thread). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) onto mounting strap (A) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto mounting strap (A). Tuck all wires neatly into the junction box.

## FINISHING THE INSTALLATION


5. Place backplate (F) over mounting strap (A) so that mounting screws (C) protrude through the holes in backplate (F). Secure the backplate (F) to the mounting strap (A) with decorative nuts (G). Twist until the backplate of the fixture is snug against the wall.
6. Place crystal wafer (I) into the metal trough (J) and press the small iron sheets as shown in the diagram above.

Install light bulbs (not provided) in accordance with the fixture's specifications into socket (H). Do not exceed maximum wattage rating.

Your installation is now complete. Turn on the power and test the fixture.

### How to Identify the Fixture's Wires

Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	Black Inner Thread
Black Inner Thread	White Inner Thread	White Inner Thread

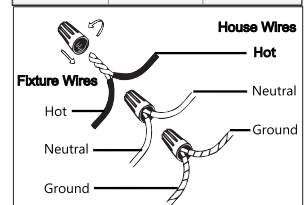

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.