


# Assembly Instructions: 1039-1W (Corbin)

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

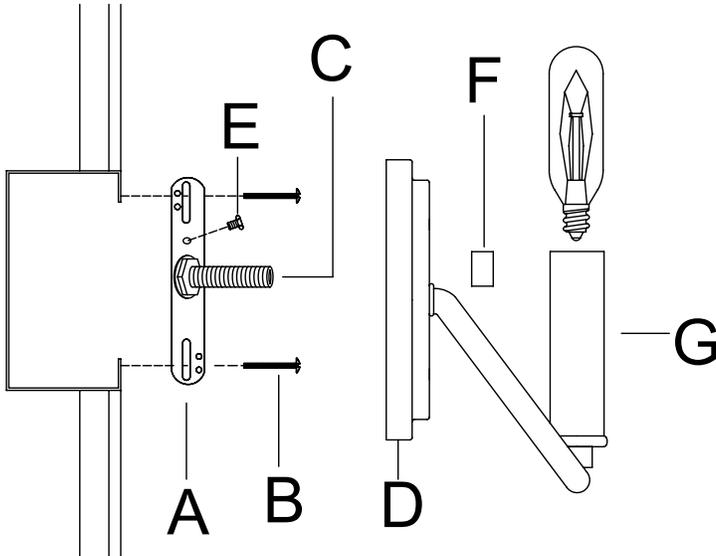

## PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the wall, including the old mounting strap.

1. Mounting strap (A) contains several pairs of threaded holes. Mounting screws (B) should be attached to the mounting strap (A). Nipple (C) should also be attached to the mounting strap (A).
2. Place mounting strap (A) over to your junction box. Place backplate (D) over the mounting strap to ensure that the nipple (C) lines up with the hole in backplate (D). This will allow you to ensure that you are hanging the fixture straight.
3. Pull the house wires through the center of mounting strap (A) and through nipple (C). Pull wires until taut. Secure mounting strap (A) to the junction box with mounting screws (B) and a screwdriver. Tighten the screws securely.

## CONNECTING THE WIRES

4. Attach the fixture's wires to the house wires pulled from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (A) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box through the nipple (C) in the mounting strap (A).

How to Identify the Fixture's Wires		
Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	
Black Inner Thread	White Inner Thread	

The diagram shows three pairs of wires being connected. On the left, the fixture wires are labeled Hot, Neutral, and Ground. On the right, the house wires are labeled Hot, Neutral, and Ground. The Hot wires are connected together, the Neutral wires are connected together, and the Ground wires are connected together. Each pair is secured with a wire connector.

## FINISHING THE INSTALLATION

5. Place the fixture's backplate (D) over mounting strap (A). Nipple (C) should protrude through the center hole in backplate (D).
6. Secure backplate (D) to mounting strap (A) and junction box with finial (F) by twisting the finial (F) onto the nipple (C) until tight.
7. Twist until the backplate (D) of the fixture is snug against the wall.
8. Place socket cover (G) over the exposed socket.

Install a light bulb (not provided) based on the fixture's specifications. Do not exceed the maximum wattage.

Your installation is complete. Turn on the power and test the fixture.

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.