
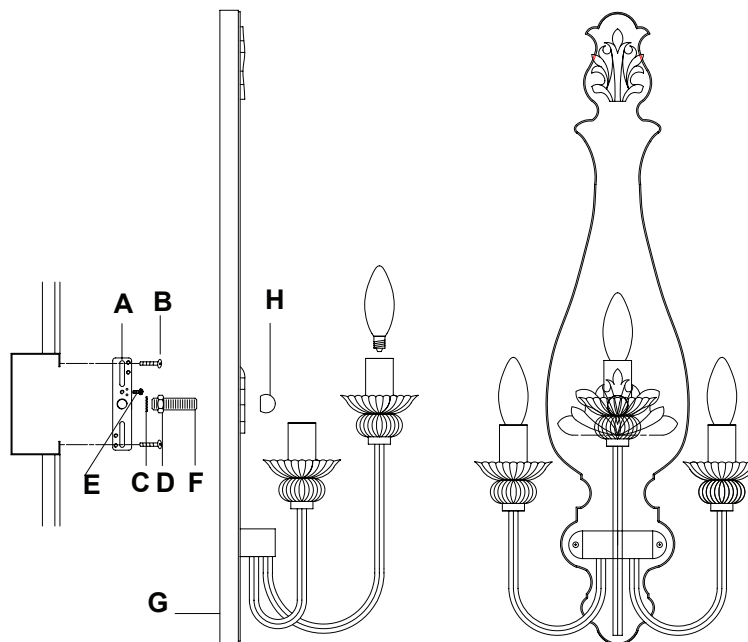


Assembly Instructions: 0874-3W

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

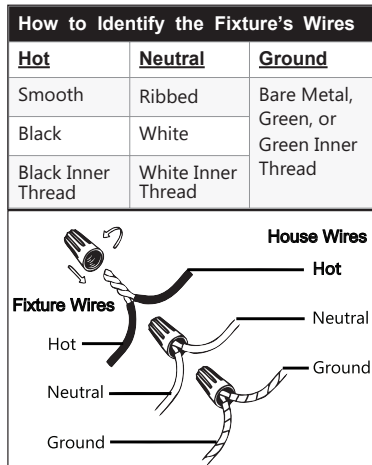

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Remove the old fixture from the wall, including the old mounting bracket.

1. From the parts bag remove the mounting strap assembly. One end of nipple (F) should be attached to mounting strap (A) with washer (C) and hex nut (D) in place. Attach mounting strap (A) to the junction box using mounting screws (B) and a screwdriver. Tighten securely. Pull house wires from the center of the mounting strap.

CONNECTING THE WIRES

2. Have an assistant support the weight for the fixture while connecting wires. Attach the fixture's wires to the house wires pulled earlier from the junction box. Connect Hot to Hot (black wire, transparent wire with black inner thread, or smooth wire), Neutral to Neutral (white wire, transparent wire with white inner thread, or the ribbed wire), and Ground to Ground (green wire, transparent wire with green inner thread, or the copper wire). Twist the ends of each wire pair together. Secure each connection with a wire connector (usually orange). Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, please locate ground screw (E) on the mounting strap (A) and wrap the fixture's ground wire around ground screw (E). Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting bracket. Tuck the wires into the junction box.

FINISHING THE INSTALLATION

3. Hold backplate (G) up to the mounting strap on the wall. Align the hole in the backplate (G) with nipple (F) and push the backplate (G) against the mounting strap until nipple (F) protrudes from the backplate hole. Secure the backplate for the fixture to the mounting strap by threading ball (H) onto the nipple (F) until tight. The backplate should now be snug against the wall.

Install light bulbs (not included) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.