
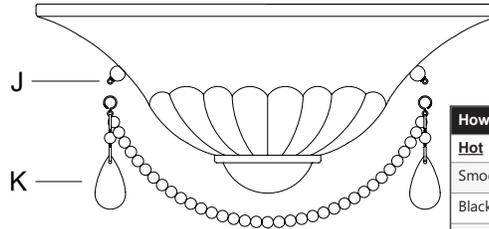


Assembly Instructions: 3719-WSC

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

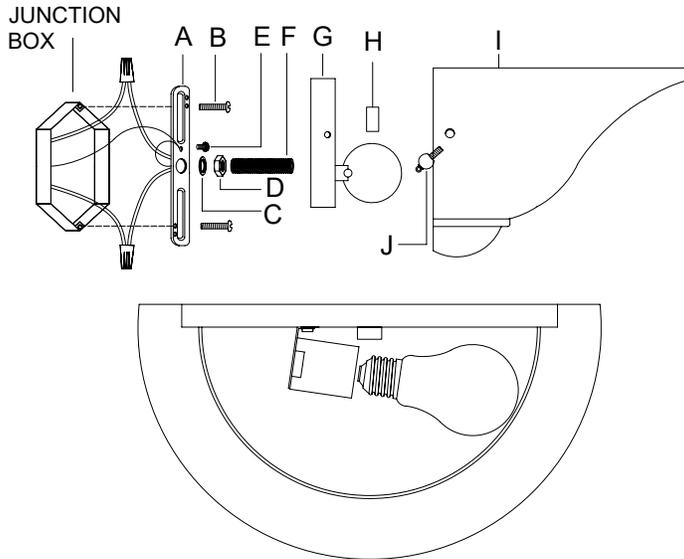

How to Identify the Fixture's Wires		
Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	
Black Inner Thread	White Inner Thread	

House Wires

Hot

Neutral

Ground

Fixture Wires

Hot

Neutral

Ground

PREPARING FOR INSTALLATION

Carefully remove the new fixture from the carton as well as the yellow bag that holds all of the parts. See the important notes above. Shut off power at the circuit breaker and remove old fixture from wall, including the old mounting strap.

1. Mounting strap (A) is attached to the backplate (G) and contains several pairs of threaded holes and a set of mounting screws (B). Remove the mounting plate from the backplate. Find the pair of holes that matches the spacing of the holes on the junction box and your fixture's backplate (G). Pull the house wires through the center of mounting strap (A). Place mounting strap (A) over the junction box and secure mounting strap (A) to the junction box with mounting screws (B) and a screwdriver. Tighten the screws securely.

CONNECTING THE WIRES

2. Have an assistant support the fixture's weight while completing the wiring. Cut away the excess wires. Attach the fixture's wires to the house wires which were pulled earlier from the junction box through the mounting strap (A). Connect hot to hot (black wire, transparent wire with black inner thread, or smooth wire); neutral to neutral (white wire, transparent wire with white inner thread, or ribbed wire); ground to ground (green wire, transparent wire with green inner thread, or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) coming from the junction box, locate ground screw (E) on the mounting strap and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

FINISHING THE INSTALLATION

3. Take nipple (F) from parts bag and thread into center hole found on mounting strap (A). Tighten with hex nut (D) and washer (C) to secure in place. Place the fixture backplate (G) over nipple (F), so nipple (F) protrudes through the hole in the backplate (G). Thread the finial (H) onto nipple (F) and continue threading until the backplate (G) is snug against the wall.
4. Install a light bulb (not provided) in accordance with the fixture's specifications. Do not exceed maximum recommended wattage.
5. Hold glass shade (I) up over the socket against backplate (G).
6. Secure glass shade (I) in place using small finials (J) on the side of the glass shade.
7. Hang decorative crystal beads (K) from the ends on found on the small finials (J).

Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.