

Assembly Instructions: 2247-3P/5 (Paris)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!


Assembly is required for the fixture and cage.
Crystals must be hand placed

For Customer Service, please
contact the place of purchase.

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

1. The fixture can be installed in two different ways. Decide how you would like to hang the fixture. Take the mounting strap assembly from the parts bag. One end of nipple (F) should be attached to mounting strap (A). Canopy loop (H) is attached to the other end. Securely attach mounting strap (A) to the junction box using mounting screws (B) and a screwdriver.
2. Unscrew canopy loop collar (I) from canopy loop (H). Pass canopy (G) over the mounted canopy loop to test the height. Approximately half of the canopy loop's exterior threads should be exposed, and the canopy loop collar should fit snugly onto the canopy loop. Remove canopy (G) and adjust the height of nipple (F) and canopy loop (H) until the desired height is reached.

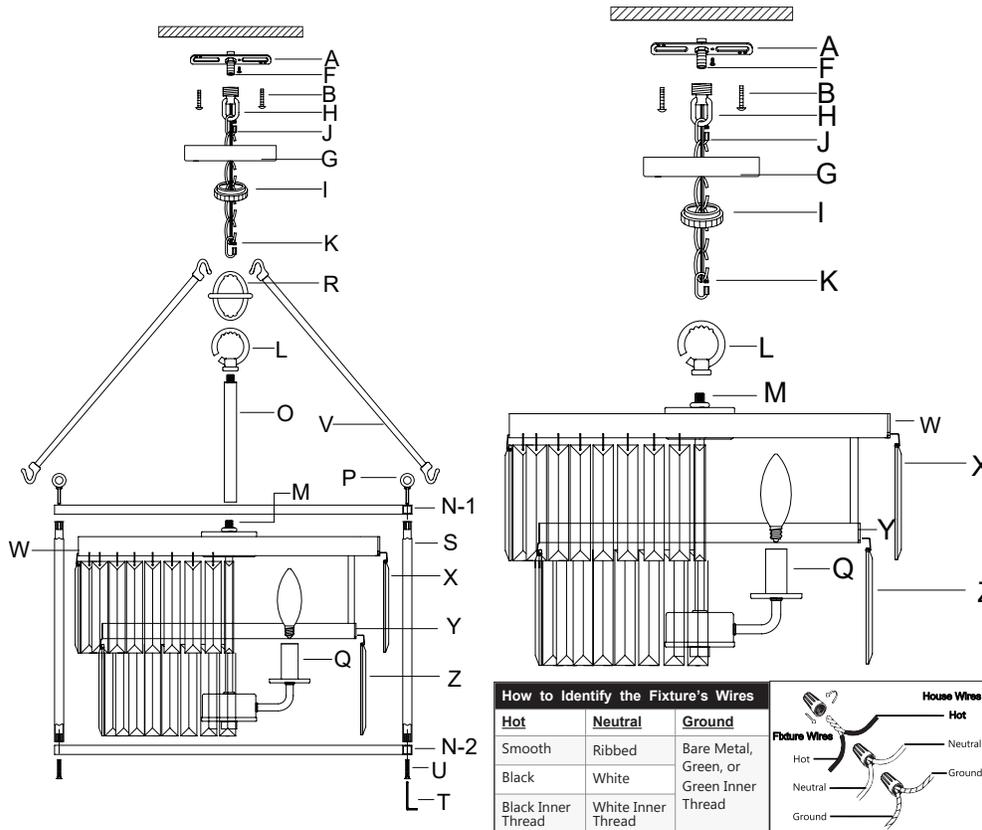

ASSEMBLING THE FIXTURE

3. Slide candle sleeves (Q) over the sockets. Thread the fixture's wires through center rod (O) and post (M) at the center of the fixture's lamp cluster. Refer to the diagrams. If installing with the optional cage, attach top rod (O) to post (M). Assemble the cage by using screws (P) and (U) and allen wrench (T) to connect frame sides (S) to frame top and bottom (N-1 and N-2). Hold the assembled cage up so that the fixture's lamp cluster is inside and have an assistant attach the bottom hooks of connector rods (V) to the loops (P) of the cage. Do not let go of the cage until all rods (V) are attached. Attach the free ends of rods (V) to the holes in top ring (R). If installing without the cage, top rod (O) is optional.

4. Measure to determine the correct length of chain needed. If necessary, use a pair of pliers to open and remove any excess chain. Attach one of chain connectors (K) to chain (J). Pass the fixture's wires through top loop (L). Attach one end of chain connector (K) to top loop (L) and close chain connector (K). Feed the fixture's wires up through the chain (every three links or so), pulling the wires until taut. Use the free chain connector (K) to attach chain (J) to canopy loop (H). Slide canopy loop collar (I) and canopy (G) down onto the chain/wires. Add 8 to 10 inches to the desired wire length.

How to Identify the Fixture's Wires		
Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	
Black Inner Thread	White Inner Thread	

CONNECTING THE WIRES

5. Have an assistant support the fixture's weight while completing the wiring. Refer to the wiring diagram and attach the fixture's wires to the power supply wires from the junction box. Connect Hot to Hot (black wire, transparent wire with black inner thread, or smooth), Neutral to Neutral (white wire, transparent wire with white inner thread, or ribbed), and Ground to Ground (green wire, transparent wire with green inner thread, or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, locate ground screw (E) on the mounting bracket/mounting strap and wrap the fixture's ground wire around the ground screw. Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting strap. Tuck the wires into the junction box.

FINISHING THE INSTALLATION

6. Push canopy (G) up to the ceiling and slide canopy loop collar (I) up beneath the canopy. Tightly thread canopy loop collar (I) onto canopy loop (H) to secure canopy (G) in place.
7. Install light bulbs (not included) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.
8. Hook crystals (Z) onto the bottom shade frame (Y), and then crystals (X) onto the top shade frame (W).

Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

