

# Assembly Instructions: 8001-LP (Parrish)

## IMPORTANT:


- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase.

## 1. PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

From the parts bag remove the mounting strap assembly. One end of nipple (F) should be attached to mounting strap (A) with washer (C) and hex nut (D) in place. The other end should have canopy loop (H) attached. Attach mounting strap (A) to the junction box using mounting screws (B) and a screwdriver. Tighten securely.

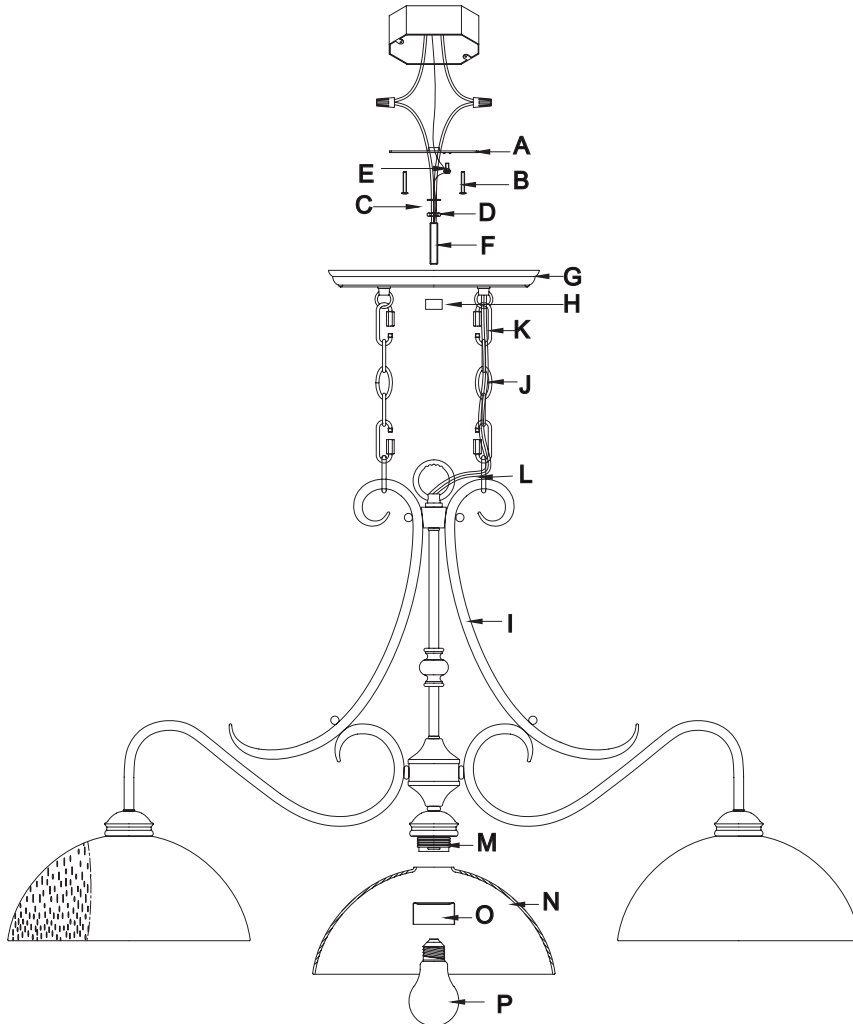

## 2. ASSEMBLING THE FIXTURE

Carefully place the bottom of the fixture on a flat surface. The top loop is on the center column, pass the fixture wires through the top loop. By measuring, determine the correct number of chain links needed for proper hanging height. If necessary, use a pair of pliers to open and remove any excess chain. Attach one chain connector (K) to each end of chain (J). Use one of chain connectors (K) to attach chain (J) to loop (L) and close the chain connector. Feed the fixture wires up through one side of the chain (every three links or so), pulling the wires until taut. Connect the other end of the chain to the corresponding canopy loop using chain connector (K). Use the other link of chain and chain connectors (K) on either end of chain (J) to connect the fixture's body to the canopy. Be sure to close the chain connectors. Pass the wires through the center of the canopy.

## 3. CONNECTING THE WIRES


Have an assistant support the fixture's weight while completing the wiring. Cut away excess wire. Thread the fixture's wires through canopy loop and nipple. Attach the fixture's wires to the power supply wires from the junction box. Connect black to smooth/black/transparent (L) wire; white to ribbed/white/transparent (N) wire; ground to ground (green or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (A) and wrap the fixture ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket/mounting strap. Tuck all wires.

## 4. FINISHING THE INSTALLATION

Push canopy (G) up to the ceiling so that nipple (F) protrudes through the hole in the center of the canopy. Thread decorative nut (H) onto nipple (F).

Slide glass shades (N) over the sockets (M) and secure in place with socket rings (O). Install light bulbs (P - not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is complete. Turn on the power and test the fixture.

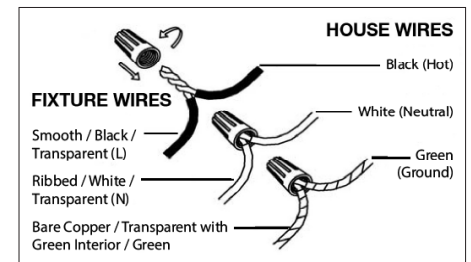

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

